




Type 2 mobile connector, compliant with IEC 62196-1 and IEC 62196-2, designed for charging electric vehicles compliant with IEC 61851-1 regulations, equipped with an external textured coating on the lower portion to improve grip and facilitate insertion into the relative inlet. It is supplied pre-wired with a smooth 5/8 m cable or 4 m spiral cable. This product is also equipped with a rubber cable gland and has an IP55 protection rating if inserted in its protective insulating cover. Brand customisation options are available.

Couleur de la poignée	Black RAL 9004	Indice de protection	IP55 (avec gaine ou couvercle)
Résistance aux chocs	IK10	Presse-étoupes et couleur de prise	Black RAL 9004
Test du fil incandescent	850 °C (parties actives)/650 °C (externe)	Nombre de pôles	L1 - N - PE - CC - CP
Courant nominal	32 A	Température de stockage	-30 +50 °C
Longueur de câble	2,5 mm <sup>2</sup>	Fréquence nominale (Hz)	50/60 Hz
Longueur câble	5 m	Couleur du câble	Noir
Type de câble	Lisse		

## DIMENSIONS

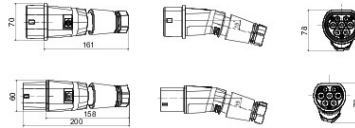

## SYMBOLE TECHNIQUE

**IP**

IP55 (avec gaine ou couvercle)

**IK**

IK10

**GWT**

850 °C (parties actives)/650 °C (externe)

## NORMES ET HOMOLOGATIONS

